


# AD 510

Doosan  
Mecc Alte  
D+ &



<b>ISO8528</b>	GC, ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

2000/14/EC

&\$\$\$#( #

z) \$' z' \$z' D:

	"	kw	"	kw	Amp
400/230	510,00	408,00	460,00	368,00	664,00

fP GDE GC, ) & fDF DE %\$! % %& GC" \$(\*\* z& GC

Standard Specifications

z fi ! E z z

1

ALTERNATOR  
D: A Ž 5J F  
fi E  
fi E

TRANSFER SWITCH  
fi E

# AD 510

Doosan  
Mecc Alte  
D+' &''

Manufacturer		Doosan		
Model		DP158LC		
		%\$\$' "# "		
		449,00 kw [602,00HP]		
	L	14,618		
	"	128 x 142		
		15,0:1		
	fl # ȷ	"# "	1500	
	fl ȷ	L	22,00	
		L	90,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	33,10		
	' # "	550,00		
	' # "	88,00		
	° C	529,00		
		24 V d.c.		
	Load	%\$\$i	'+) i	) \$i
	# "	99,60	72,90	48,90

		Mecc Alte		
		ECO 40-3S/4		
	Hz	50		
	"	500,00		
7cg'		0,80		
		3		
	fl ȷ	400/230		
	A	721,70		


		fl ȷ		fl ȷ	
	"	"	"	"	L
AD 510	3150,00	3106,00	1550,00	1994,00	700,00
		fl ȷ		fl ȷ	
	"	"	"	"	L
MS 70	4100	4460	1606	2477	700





# AD 510

Doosan  
Mecc Alte  
D+ & "

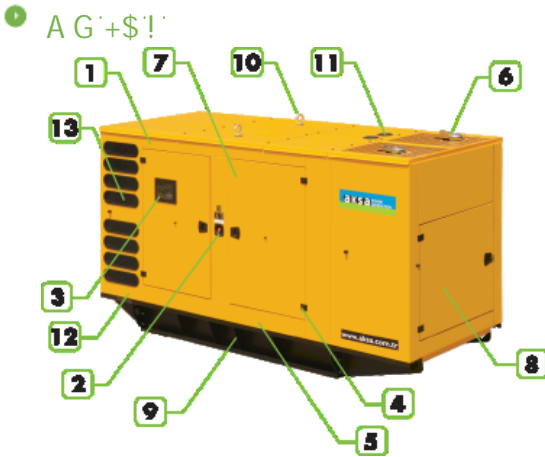

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700